



Features

- High Bandwidth: 300MHz
- High Speed turn on or off: 30ns (Typical)
- Supply Range: +1.8V to +5.5V
- Low ON-State Resistance: 4.5Ω(TYP)
- Break-Before-Make Switching
- Rail-to-Rail Operation
- TTL/CMOS Compatible
- Extended Industrial Temperature Range: -40°C to +125°C

Application

- Wearable Devices
- Battery-Operated Equipment
- Signal Gating, Chopping, Modulation or Demodulation (Modem)
- Portable Computing
- Cell Phones

Description

The RS3SW2158 is a dual, single-pole double-throw (SPDT) analog switch that is designed to operate from 1.8 V to 5.5 V.

The RS3SW2158 device can handle both analog and digital signals. It features high-bandwidth (300MHz) and low on-resistance (4.5Ω TYP).

Applications include signal gating, chopping, modulation or demodulation (modem), and signal multiplexing for analog-to-digital and digital-to-analog conversion systems.

Ordering Information

Part Number	Package	Description
RS3SW2158U	MSOP10	3.00mm×3.00mm
RS3SW2158ZN	UQFN1.4X1.8-10	1.80mm×1.40mm



**RSM**

www.raystar-tek.com

RS3SW2158

Low Voltage Dual SPDT Analog Switch

Pin Configuration

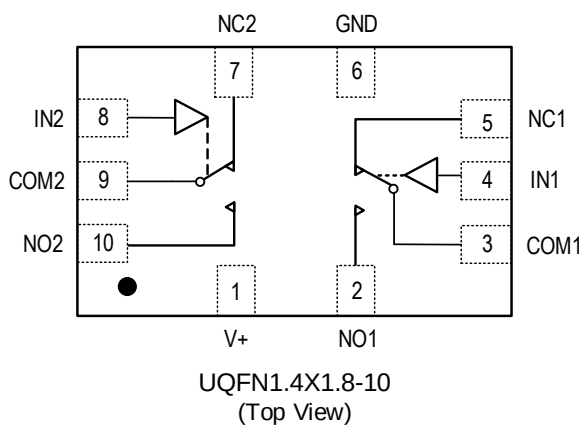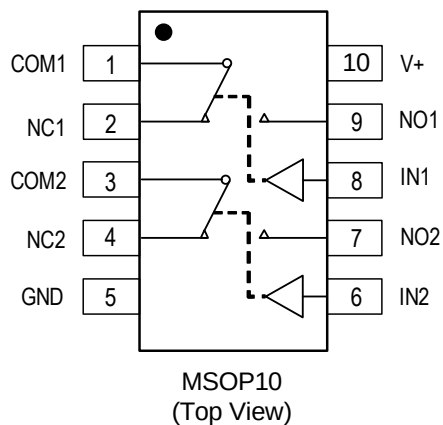

NAME	PIN	PIN	FUNCTION
	MSOP10	UQFN1.4X1.8-10	
COM1, COM2	1, 3	3, 9	Common Terminal
NC1, NC2	2, 4	5, 7	Normally-Closed Terminal
GND	5	6	Ground
IN2, IN1	6, 8	8, 4	Digital Control Pin
NO2, NO1	7, 9	10, 2	Normally-Open Terminal
V+	10	1	Power Supply

Function Table

LOGIC	NO1, NO2	NC1, NC2
0	OFF	ON
1	ON	OFF



Absolute Maximum Ratings

Over operating free-air temperature range (unless otherwise noted) ⁽¹⁾

SYMBOL	PARAMETER		MIN	MAX	UNIT
V ₊	Supply Voltage		-0.3	6.0	V
V _{IN}	Input Voltage ⁽²⁾		-0.3	6.0	
	Analog, Digital Voltage Range		-0.3	(V ₊)+0.3	
	Continuous Current NO, NC, or COM		-300	+300	mA
I _{PEAK}	Peak Current NO, NC, or COM		-500	+500	
θ _{JA}	Package thermal impedance ⁽³⁾	MSOP10		200	°C/W
		UQFN1.4X1.8-10		115	
T _J	Junction Temperature ⁽⁴⁾		-40	150	°C
T _{stg}	Storage temperature		-65	+150	

(1) Stresses above these ratings may cause permanent damage. Exposure to absolute maximum conditions for extended periods may degrade device reliability. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those specified is not implied.

(2) Input terminals are diode-clamped to the power-supply rails. Input signals that can swing more than 0.3V beyond the supply rails should be current-limited to 10mA or less.

(3) The package thermal impedance is calculated in accordance with JEDEC-51.

(4) The maximum power dissipation is a function of T_{J(MAX)}, R_{θJA}, and T_A. The maximum allowable power dissipation at any ambient temperature is P_D = (T_{J(MAX)} - T_A) / R_{θJA}. All numbers apply for packages soldered directly onto a PCB.

ESD Ratings

The following ESD information is provided for handling of ESD-sensitive devices in an ESD protected area only.

SYMBOL	PARAMETER		VALUE	UNIT
V _(ESD)	Electrostatic discharge	Human-Body Model (HBM)	±1000	V
		Charged-Device Model (CDM)		V

Recommended Operating Conditions

Over operating free-air temperature range (unless otherwise noted)

SYMBOL	PARAMETER		MIN	MAX	UNIT
V _{CC}	Supply Voltage		1.8	5.5	V
T _A	Operating temperature		-40	+125	°C



Electrical Characteristics

V+ = 5.0 V, T_A = -40°C to 125°C (unless otherwise noted)

PARAMETER	SYMBOL	CONDITIONS	V+	T _A	MIN ⁽²⁾	TYP ⁽³⁾	MAX ⁽²⁾	UNIT
ANALOG SWITCH								
Analog Signal Range	V _{NO} , V _{NC} , V _{COM}			FULL	0		V+	V
On-Resistance	R _{ON}	V _{NO} or V _{NC} = V+/2, I _{COM} = -10mA, Switch ON, See Figure 1	5V	+25°C		4.5	8	Ω
				FULL			8.5	Ω
			3.3V	+25°C		7	10	Ω
				FULL			10.5	Ω
On-Resistance Match Between Channels	ΔR _{ON}	V _{NO} or V _{NC} = V+/2, I _{COM} = -10mA, Switch ON, See Figure 1	5V	+25°C		0.15	0.3	Ω
				FULL			0.4	Ω
			3.3V	+25°C		0.15	0.3	Ω
				FULL			0.4	Ω
On-Resistance Flatness	R _{FLAT(ON)}	0 ≤ (V _{NO} or V _{NC}) ≤ V+/2, I _{COM} = -10mA, Switch ON, See Figure 1	5V	+25°C		2	3	Ω
				FULL			3.3	Ω
			3.3V	+25°C		3	4	Ω
				FULL			4.3	Ω
NC, NO OFF Leakage Current	I _{NC(OFF)} , I _{NO(OFF)}	V _{NO} or V _{NC} = 0.3V, V+/2 V _{COM} = V+/2, 0.3V See Figure 2	1.8 to 5.5V	FULL			1	μA
NC, NO, COM ON Leakage Current	I _{NC(ON)} , I _{NO(ON)} , I _{COM(ON)}	V _{NO} or V _{NC} = 0.3V, Open V _{COM} = Open, 0.3V See Figure 3	1.8 to 5.5V	FULL			1	μA
DIGITAL CONTROL INPUTS ⁽¹⁾								
Input High Voltage	V _{INH}		5V	FULL	1.5			V
			3.3V	FULL	1.3			V
Input Low Voltage	V _{INL}		5V	FULL			0.6	V
			3.3V	FULL			0.5	V
Input Leakage Current	I _{IN}	V _{IN} = V _{IO} or 0	1.8 to 5.5V	FULL			1	μA

(1) All unused digital inputs of the device must be held at V_{IO} or GND to ensure proper device operation.

(2) Limits are 100% production tested at 25°C. Limits over the operating temperature range are ensured through correlations using statistical quality control (SQC) method.

(3) Typical values represent the most likely parametric norm as determined at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration.

**RSM**

www.raystar-tek.com

RS3SW2158

Low Voltage Dual SPDT Analog Switch

AC Electrical characteristics

V₊ = 5.0 V, T_A = -40°C to 125°C (unless otherwise noted)

PARAMETER	SYMBOL	CONDITIONS	V ₊	T _A	MIN	TYP	MAX	UNIT
DYNAMIC CHARACTERISTICS								
Turn-On Time	t _{ON}	V _{COM} = V ₊ , R _L = 300Ω, C _L = 35pF, See Figure 4	5V	+25°C		30		ns
			3.3V			40		
Turn-Off Time	t _{OFF}	V _{COM} = V ₊ , R _L = 300Ω, C _L = 35pF, See Figure 4	5V	+25°C		25		ns
			3.3V			30		
Break-Before-Make Time Delay	t _{BBM}	V _{NO1} = V _{NC1} = V _{NO2} = V _{NC2} = 3V, R _L = 300Ω, C _L = 35pF, See Figure 5	5V	+25°C		5		ns
			3.3V			8		
Off Isolation	O _{ISO}	R _L = 50Ω, Switch OFF, See Figure 6		+25°C		-52		dB
				+25°C		-71		dB
-3dB Bandwidth	BW	Switch ON, R _L = 50Ω, See Figure 7		+25°C		300		MHz
NC, NO OFF Capacitance	C _{NC(OFF)} , C _{NO(OFF)}	V _{NC} or V _{NO} = V ₊ /2 or GND, Switch OFF See Figure 8		+25°C		5		pF
NC, NO, COM ON Capacitance	C _{NC(ON)} , C _{NO(ON)} , C _{COM(ON)}	V _{NC} or V _{NO} = V ₊ /2 or GND, Switch ON See Figure 8		+25°C		15		pF
POWER REQUIREMENTS								
Power Supply Range	V ₊			FULL	1.8		5.5	V
Power Supply Current	I ₊	V _{IN} = GND or V ₊	5.5V	FULL			1	μA



RSM

www.raystar-tek.com

RS3SW2158

Low Voltage Dual SPDT Analog Switch

Parameter Measurement Information

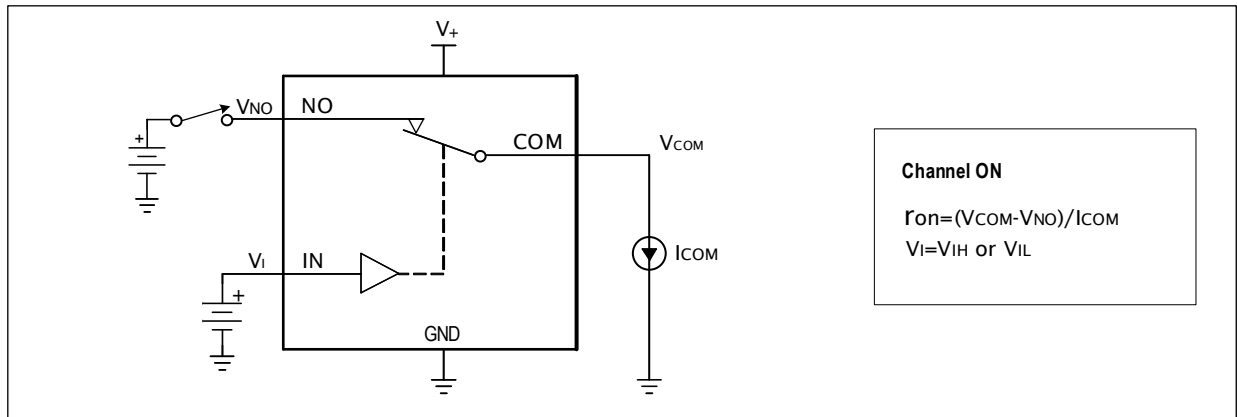


Figure 1、ON-State Resistance (R_{on})

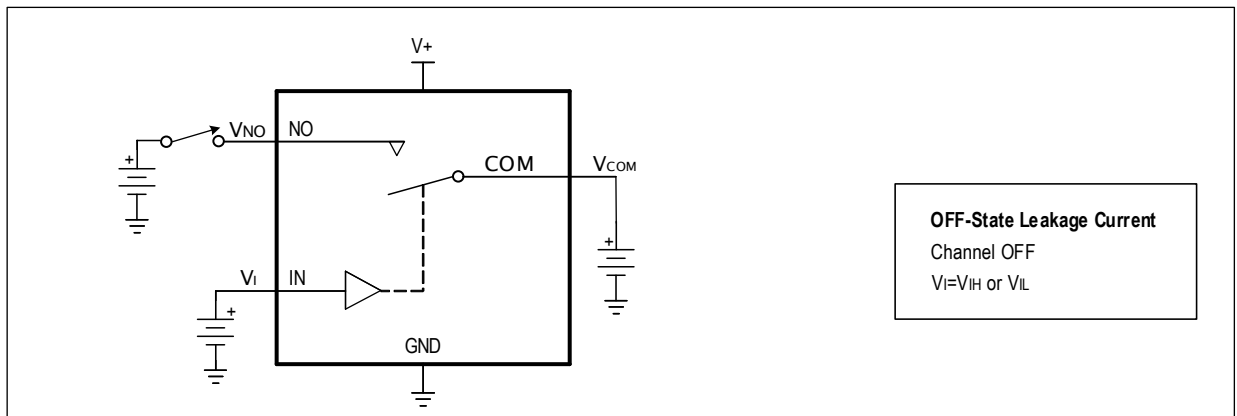


Figure 2、OFF-State Leakage Current ($I_{COM(OFF)}$, $I_{NO(OFF)}$)

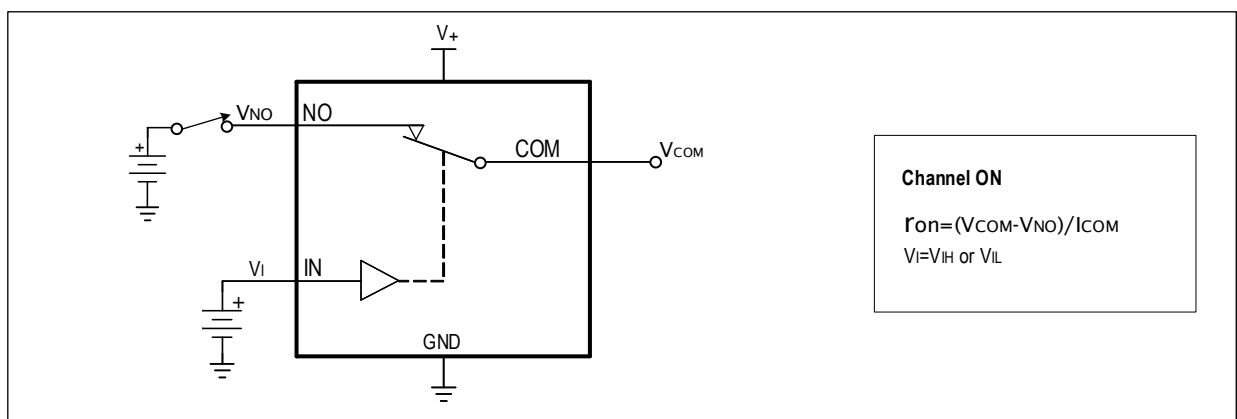





Figure 3、ON-State Leakage Current ($I_{COM(ON)}$, $I_{NO(ON)}$)

**RSM**

www.raystar-tek.com

RS3SW2158

Low Voltage Dual SPDT Analog Switch

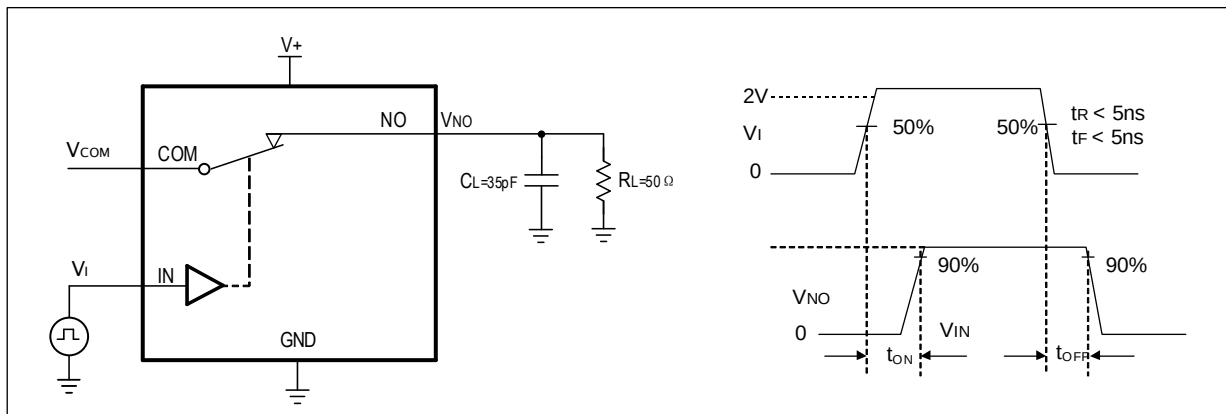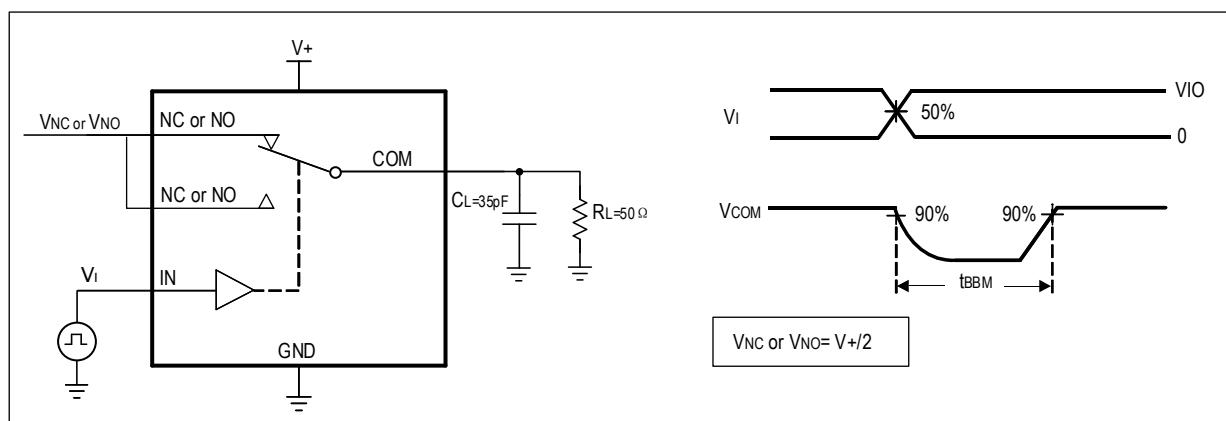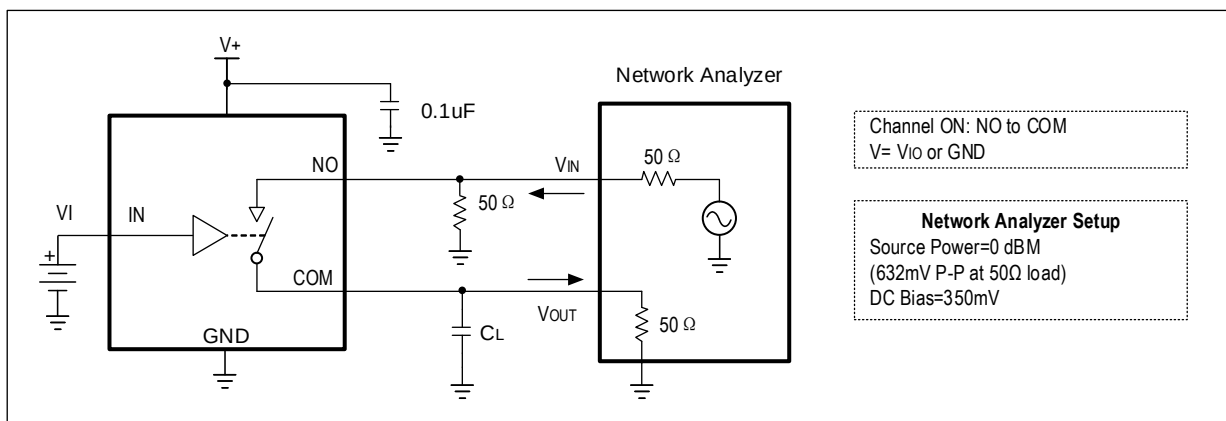**Figure 4、 Turn-On (t_{ON}) and Turn-Off Time (t_{OFF})****Figure 5、 Break-Before-Make Time (t_{BBM})****Figure 6、 OFF Isolation (OISO)**



RSM

www.raystar-tek.com

RS3SW2158

Low Voltage Dual SPDT Analog Switch

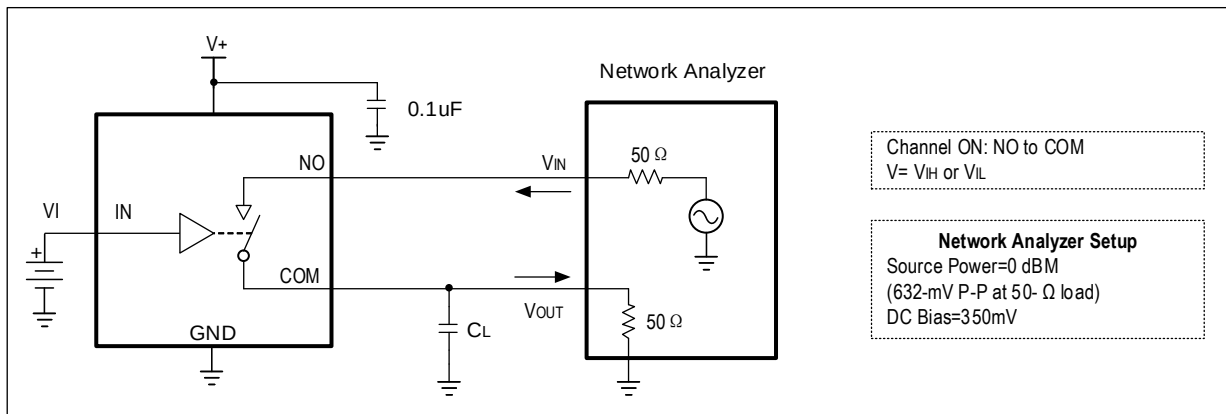


Figure 7、Bandwidth (BW)

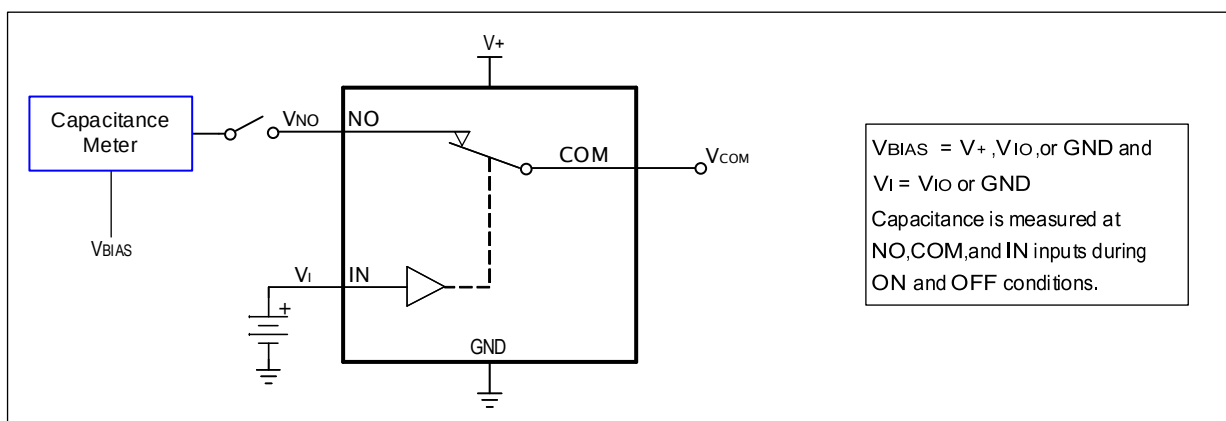


Figure 8、Capacitance (C_I , $C_{COM(OFF)}$, $C_{COM(ON)}$, $C_{NO(OFF)}$, $C_{NO(ON)}$)

**RSM**


www.raystar-tek.com

RS3SW2158

Low Voltage Dual SPDT Analog Switch

Package Information

MSOP10

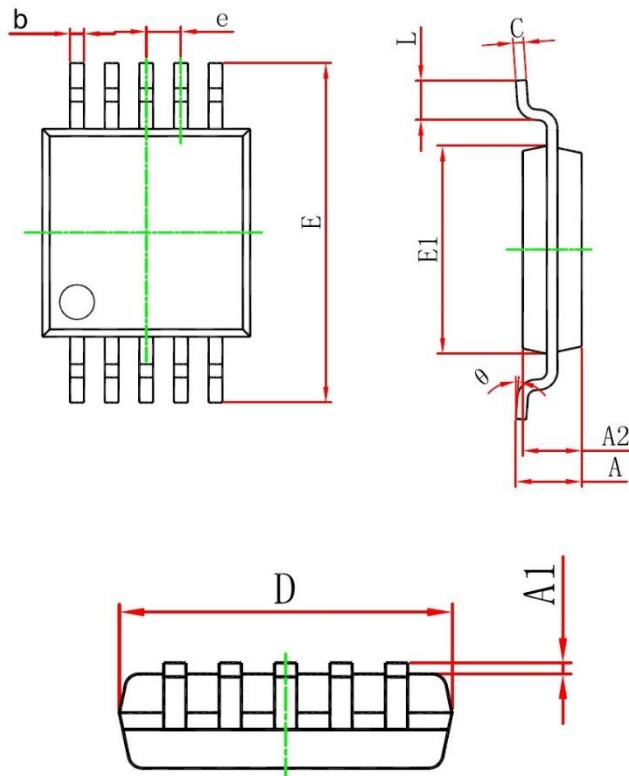

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	---	1.100	---	0.043
A1	0.020	0.150	0.001	0.006
A2	0.750	0.950	0.030	0.037
b	0.180	0.330	0.007	0.013
c	0.090	0.230	0.004	0.009
D	2.900	3.100	0.114	0.122
e	0.500 (BSC)		0.020 (BSC)	
E	4.750	5.050	0.187	0.199
E1	2.900	3.100	0.114	0.122
L	0.400	0.800	0.016	0.031
θ	0°	6°	0°	6°

Note:

- 1.All dimensions are in mm. Angles in degrees.
- 2.Refer Jedec MO-187
- 3.Dimensions exclude burrs, mold flash or protrusions.



MSOP10 POD Rev:0


Raystar Microelectronics Technology Inc.

**RSM**


www.raystar-tek.com

RS3SW2158


Low Voltage Dual SPDT Analog Switch

UQFN1.4X1.8-10

TOP VIEW

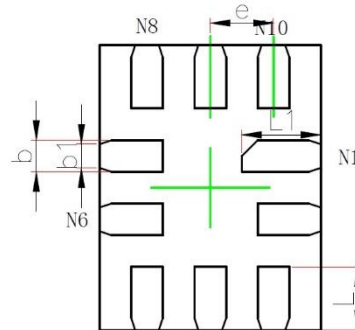

BOTTOM VIEW

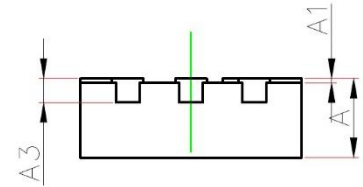

SIDE VIEW

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.500	0.600	0.020	0.024
A1	0.000	0.050	0.000	0.002
A3	0.152REF.		0.006REF.	
D	1.350	1.450	0.053	0.057
E	1.750	1.850	0.069	0.073
D1	—	—	—	—
E1	—	—	—	—
k	—		—	
b	0.150	0.250	0.006	0.010
b1	0.100	0.200	0.004	0.008
e	0.400TYP.		0.016TYP.	
L	0.350	0.450	0.014	0.018
L1	0.450	0.550	0.018	0.022

Note:

1. All dimensions are in mm.

2. Dimensions exclude burrs, mold flash or protrusions.

3. Refer JEDEC MO-220



UQFN 1.4X1.8 10L POD Rev: 0
Raystar Microelectronics Technology Inc.

**RSM**

www.raystar-tek.com

RS3SW2158Low Voltage Dual SPDT Analog Switch

Revision History

Revision	Description	Date
V0.9	Preliminary	2024/8/12
V1.0	Initial Release	2024/3/04
V1.1	Modify Pin configuration diagram Modify Ordering Information table	2025/09/10