




Features

- Spread Spectrum Crystal oscillator IC (Programmable)
- Operating frequency range: 20MHz~27MHz
- 0.25~160MHz Output Frequency range
- Operating voltages: 1.62 V to 3.63V
- Operating temperature: -40°C to +125°C
- Configurable spread spectrum settings:
 - 7 kinds of spread:
 $\pm 0.0625\%$, $\pm 0.125\%$, $\pm 0.25\%$, $\pm 0.5\%$, $\pm 1\%$, $\pm 1.5\%$, $\pm 2.0\%$
- OE disable function
- 3 kinds of Rise time/Fall time:
Default mode, Fast mode and Slow mode
- Modulation Frequency: $F_{IN}/804$
- Spread Profile: Triangle
- Used for Fundamental Crystal Oscillator
- Used for 7050/5032/3225/2520 package
- AEC-Q 100 qualified. PPAP capable, and manufactured in IATF 16949 certified facilities.

Benefits

- Reduction in EMI
- System cost saving
- Reduced system complexity
- Faster time to market

Block Diagram

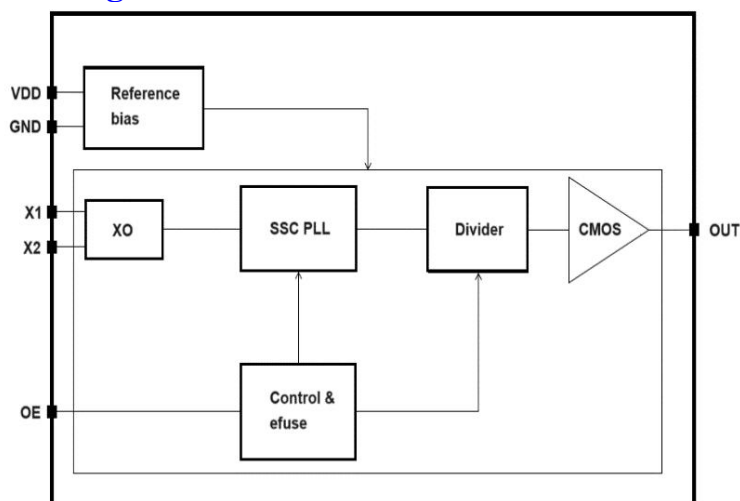

Description

The XO6502-V are Programmable Crystal Oscillator IC series with CMOS output.

This series offer the easy programmability of frequencies and other parameters, they also have a wider operating temperature range, from -40°C to +125°C. Users will be able to program the products to the required output frequency, as well as to the required spread spectrum settings.

This will also significantly contribute to performance, lower power requirements, fast development cycles, and low-volume production.

Ordering Information


Part no.	Package type
XO6502-xDE-V	Die form
XO6502-xWF-V	Wafer form

Note:

1. “-x” shows the die thickness, “-3” Stand for thickness 130+/-15um
2. “DE” stands for chip form, “WF” stands for Wafer form



Pad Configuration

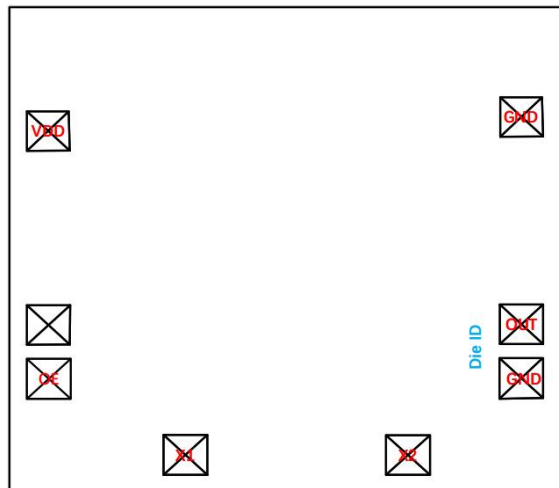

Pad Coordinate File					
Pad Name	X Coordinate	Y Coordinate	Pad Name	X Coordinate	Y Coordinate
VDD	-320.695	174.55	X2	166.99	-305.695
NC	-320.695	-113.075	GND	320.695	-192.82
OE	-320.695	-193.075	OUT	320.695	-112.82
X1	-135.95	-305.695	GND	320.695	193.96
Note: Substrate is connected to GND or floating					
Die Size: 750um * 720um (Not including scribe line, Scribe line with 60um)					
Die thickness: 130um±15um(-3), 100um±15um(-4)					
Pad size: 60um * 60um					
Substrate level: GND or Floating					

Pad Description

Sym.	Type	Description
VDD	P	Supply voltage.
X1	I	Oscillator input pin.
X2	O	Oscillator output pin.
GND	P	Ground (-).
OE or $\overline{ST}$	I	OE: H: Normal output; L: Disable output, Oscillation normal work; $\overline{ST}$: H: Normal output; L: Disable output, Oscillation stop; Note: Can trimming to OE or $\overline{ST}$
OUT	O	Output pin
NC		No Connection

Note: * Please do not use the OE/ $\overline{ST}$ terminal in the open state.



Maximum Rating

Supply Voltage to Ground Potential.....	4V
OE pin	$V_{DD}+0.9V$
Storage Temperature.....	-55°C to +150°C

Note:

Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

Recommended Operating Conditions

(GND=0V, unless otherwise noted.)

Sym.	Parameter	Conditions	Min	Typ	Max	Unit
F_{IN}	Input Frequency	-	20	-	27	MHz
F_O	Output frequency		0.25	-	160	MHz
V_{DD}	Supply voltage	-	1.62	-	3.63	V
V_{IN}	Input voltage	OE/ $\overline{ST}$ terminal	0	-	V_{DD}	V
T_A	Operating temperature	-	-40	25	+125	°C
L_{CMOS}	CMOS load condition	-	-	-	15	pf

Note:

* 0.1μF or over bypass capacitor should be connected between VCC and GND pins located close to the device.



DC Characteristics

V_{DD}= 1.62V to 3.63V, Ambient Temperature -40 to +125°C

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I _{DD}	Current consumption	V _{DD} =1.8V No load	2MHz	5.02		mA
			10MHz	-	5.8	mA
			25MHz	-	6.2	mA
			50MHz	-	6.6	mA
			100MHz	-	7.4	mA
			160MHz	-	8.1	mA
		V _{DD} =2.5V No load	2MHz	5.03		mA
			10MHz	-	6.4	mA
			25MHz	-	6.91	mA
			50MHz	-	7.4	mA
			100MHz	-	8.3	mA
			160MHz	-	9.3	mA
		V _{DD} =3.3V No load	2MHz	5.04		mA
			10MHz		6.6	mA
			25MHz		7.2	mA
			50MHz		7.8	mA
			100MHz		9.1	mA
			160MHz		10.4	mA
I _{DIS}	Disable current	V _{DD} =1.8V		5.9		mA
		V _{DD} =2.5V		6.6		mA
		V _{DD} =3.3V		6.7		mA
I _{STD}	Standby current	V _{DD} =1.8V	-	1	-	mA
		V _{DD} =2.5V	-	1	-	mA
		V _{DD} =3.3V	-	1	-	mA
V _{OH}	Output high voltage	V _{DD} =1.8V, I _{OH} = -2.5mA	0.9V _{DD}	-	-	V
		V _{DD} =2.5V, I _{OH} = -4.0mA				
		V _{DD} =3.3V, I _{OH} = -5.0mA				
V _{OL}	Output low voltage	V _{DD} =1.8V, I _{OL} = 2.5mA	-	-	0.15V _{DD}	V
		V _{DD} =2.5V, I _{OL} = 4.0mA				
		V _{DD} =3.3V, I _{OL} = 5.0mA				
V _{IH}	HIGH level input voltage	OE/ $\overline{\text{ST}}$ terminal	0.8V _{DD}	-		V
V _{IL}	LOW level input voltage	OE/ $\overline{\text{ST}}$ terminal	-	-	0.2V _{DD}	V
C _{IN}	Input pull-up resistance	OE/ $\overline{\text{ST}}$ terminal	-	2.5	5	pf
R _{UP1}	Input pull-up resistance	OE/ $\overline{\text{ST}}$ = 80 % V _{DD}	20	-	150	kΩ
R _{UP2}		OE/ $\overline{\text{ST}}$ = 20 % V _{DD}	5	-	60	MΩ
R _{DN}	Output pull-down resistance	OE = GND, OUT = V _{DD}	0.5		5	MΩ



AC Characteristics

V_{DD}= 1.62V to 3.63V, Ambient Temperature -40 to +125°C

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
T _{STR}	Start-up time	V _{DD} >1.62V	-	-	5	ms
Duty cycle	Output duty cycle	Load=15pf, 50%V _{DD}	45	50	55	%
T _r /T _f	Rise time/Fall time (20%V _{DD} ~80%V _{DD})	f _o ≤ 20 MHz (Slow mode)			10	ns
		f _o ≤ 40 MHz (Default)			6	ns
		f _o > 40 MHz (Default)			3	ns
		Fast mode			3	ns
T _{stp_OE}	Output disable time (OE)	OE terminal HIGH → LOW			1	μs
T _{stp_ST}	Output disable time (ST)	$\overline{ST}$ terminal HIGH → LOW			1	μs
T _{sta_OE}	Output enable time (OE)	OE terminal LOW → HIGH			1	μs
T _{sta_ST}	Output enable time (ST)	$\overline{ST}$ terminal LOW → HIGH			3	ms
t _{c-c}	Cycle to Cycle jitter (Clock cycle > 50 000)	V _{DD} =1.8V load=15pf	10MHz		312.1	ps
			20MHz		225.3	ps
			50MHz		91.7	ps
			100MHz		70.4	ps
			160MHz		65.6	ps
		V _{DD} =2.5V load=15pf	10MHz		292.9	ps
			20MHz		136.6	ps
			50MHz		48.7	ps
			100MHz		37.6	ps
			160MHz		40	ps
		V _{DD} =3.3V load=15pf	10MHz		290.1	ps
			20MHz		128.8	ps
			50MHz		44.6	ps
			100MHz		31.3	ps
			160MHz		29.5	ps
f _{mod}	Modulation frequency			Fin/804		KHz


Note: Typical condition is on room temperature at 25°



Measurement Circuit

Measurement cct1


Measurement parameter: I_{DD} , I_{ST} , Duty, t_r , t_f

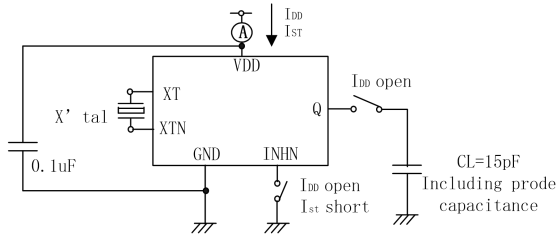

Note: The AC characteristics are observed using an oscilloscope on pin Q


Measurement cct2

Measurement parameter: t_{OD}

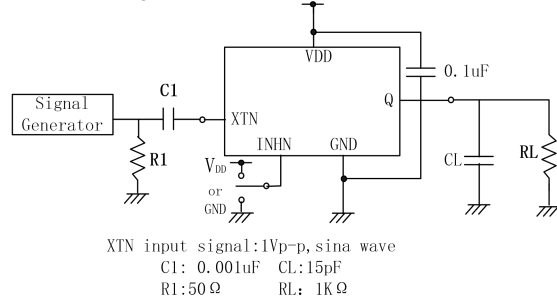


Measurement cct3

Measurement parameter: V_{OH} , V_{OL}

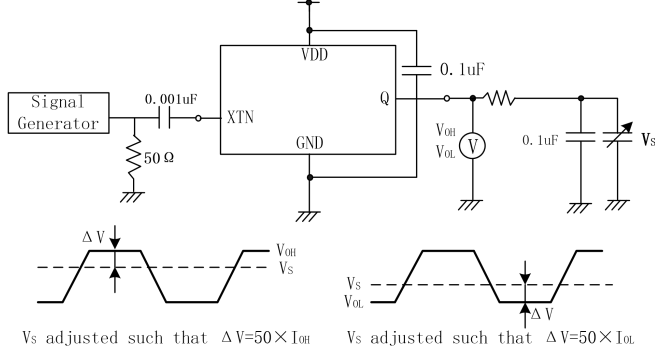

Measurement cct4


Measurement parameter: V_{IH} , V_{IL}

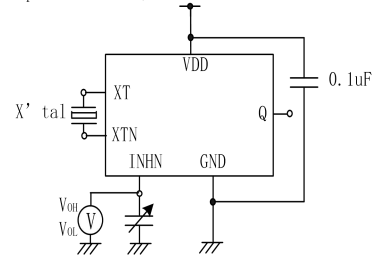

V_{IH} : Voltage is 0V to V_{DD} transition that changes the output state.
 V_{IL} : Voltage is V_{DD} to 0V transition that changes the output state.
INHN has an oscillation stop function


Measurement cct5

Measurement parameter: I_Z

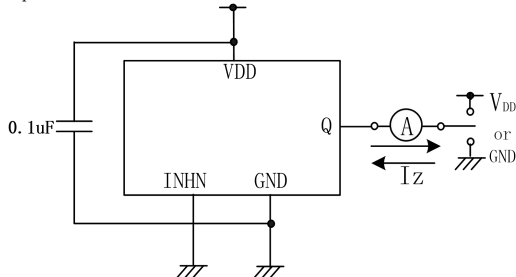

Measurement cct6


Measurement parameter: R_{UP1} , R_{UP2}

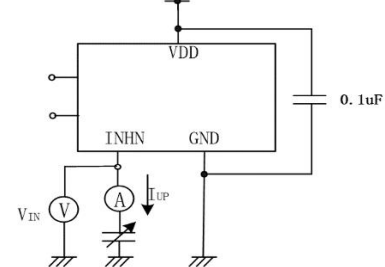



Timing Chart

(1) Output Waveform and Level

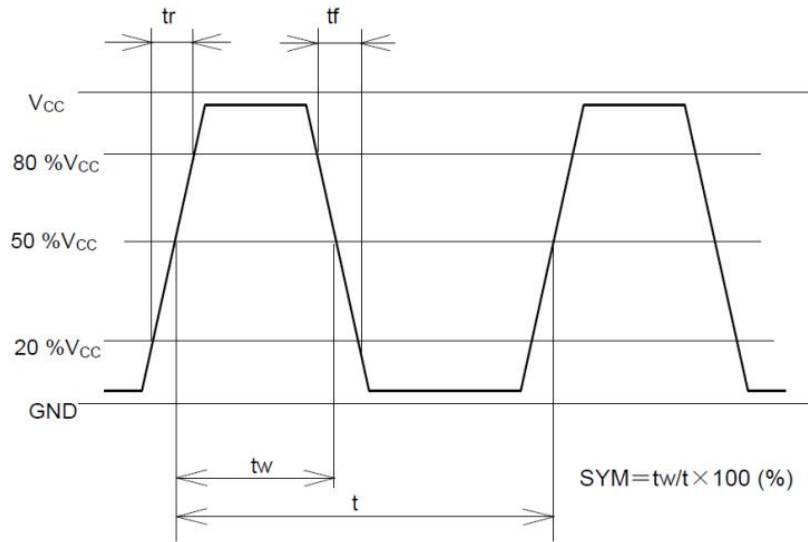



Revision History

Revision	Description	Date
V1.0	Official release	2025/12/16